




# Redesign Paver



## ReDesign Paver

- Recycle asphalt to any depth up to 4 inches.
- Recycles at 380 Degree F. This ideal temperature will not overheat asphalt during recycling.
- Completely automated. Just enter desired recycle depth and length of area to recycle.
- Recycle asphalt while adding additional materials to make high performance PEAK asphalt in cases where the patch is left open to traffic.
- Recycle asphalt by adding only rejuvenating oil when patch is soon covered with overlay or chip seal.

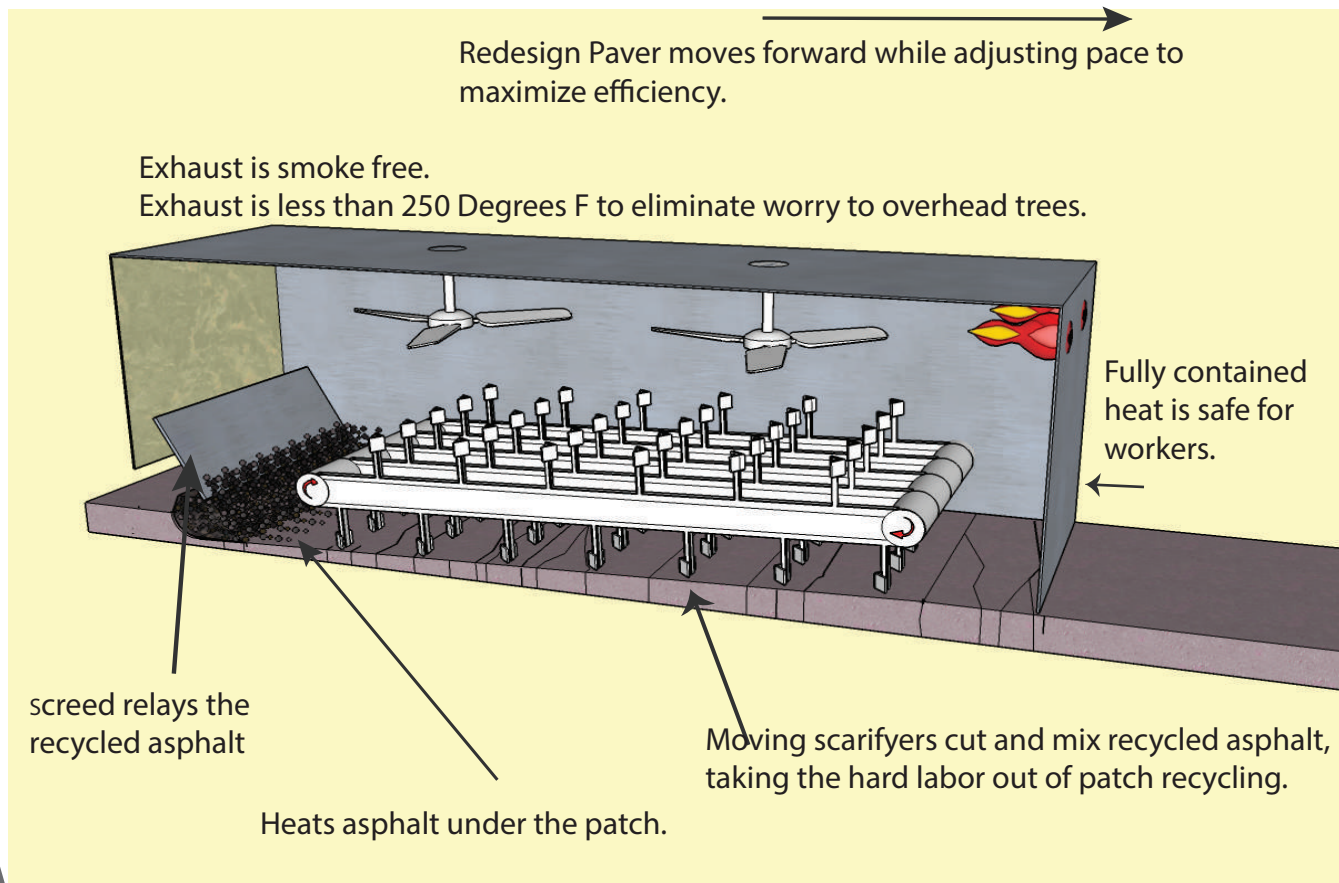



Often part of the road is worse than the rest. Recycle the worst areas of your road or parking area before you overlay for maximum life of the pavement.








Recycle before overlays and chipseals to help stop reflective cracking. Add polymerized rejuvenating oil from Diamond Road.

When the recycled patch will not be soon covered with an asphalt overlay a high performance patch is required. Recycle and make PEAK asphalt when extreme durability is necessary. Add crushed aggregate and highly polymerized asphalt to make PEAK asphalt, a high performance eight percent oil rubberized asphalt.



**www.diamondroad.com**  
**2185 Tracy Hall Parkway**  
**Provo, Utah 84606**  
**Office: (317) 572-ROAD(7623)**  
**Cell: (801) 921-2660**

-  [facebook.com/DiamondRoad.US](https://facebook.com/DiamondRoad.US)
-  [google.com/+DiamondRoadUS](https://google.com/+DiamondRoadUS)
-  [twitter.com/DiamondRoad1](https://twitter.com/DiamondRoad1)
-  [linkedin.com/company/diamond-road](https://linkedin.com/company/diamond-road)
-  [youtube.com/c/DiamondRoadUS](https://youtube.com/c/DiamondRoadUS)